



Est. 1956
Guard Sales
Company, Inc



VAL6 DIESEL-FIRED INFRARED RADIANT HEATERS



DAYSTAR



**MODEL: M
(MPX)**



**MODEL: S
(KBE5S)**



**MODEL: L
(KBE5L)**



**MODEL: X
(EPX)**

FEATURES

- **99.5% EFFICIENT BURNING #2 OFF-ROAD DIESEL** ●
- **NO FUMES - NO ODOR - QUIET OPERATION - PORTABLE** ●
- **CAN BE OPERATED WITH A 12V POWER INVERTER** ●
- **THERMOSTAT AND FUEL PREHEATER (MODELS L & X ONLY)** ●

SPECIFICATIONS

					
Model	DAYSTAR	MPX (M)	KBE5S (S)	KBE5L (L)	EPX (X)
BTU	51,800 BTU	Low: 55,500 BTU High: 62,500 BTU	111,000 BTU	Low: 100,000 BTU High: 118,000 BTU	Low: 100,000 BTU High: 140,000 BTU
Power Usage	105w	145w	100w	120w	Low: 96w High: 97w
Fuel Tank	2.6 gal	6.6 gal	9.0 gal	15.1 gal	15.4 gal
Fuel Flow	.40 GPH	Low: 0.42 GPH High: 0.48 GPH	0.85 GPH	Low: 0.75 GPH High: 0.90 GPH	Low: 0.75 GPH High: 1.02 GPH
Maximum Run Time	6.5 hrs	Low: 15.7 hrs High: 13.7 hrs	10.5 hrs	Low: 20.1 hrs High: 16.8 hrs	Low: 20.5 hrs High: 15.1 hrs
Size H x W x D	23" x 12" x 23"	28" x 21" x 27"	36" x 26" x 28"	40" x 28" x 27"	38" x 25" x 49"
Weight	40 lbs	71 lbs	84 lbs	96 lbs	110 lbs



Est. 1956
Guard Sales
Company, Inc



1404 S Kansas Ave.
Topeka Ks, 66612



(785) 235-1378
1-800-443-2445



GuardSalesCo.com




Est. 1956
Guard Sales
Company, Inc




LEARN MORE

HEAT DISTRIBUTION COMPARISON **VAL6** VS. Forced Air (Torpedo)

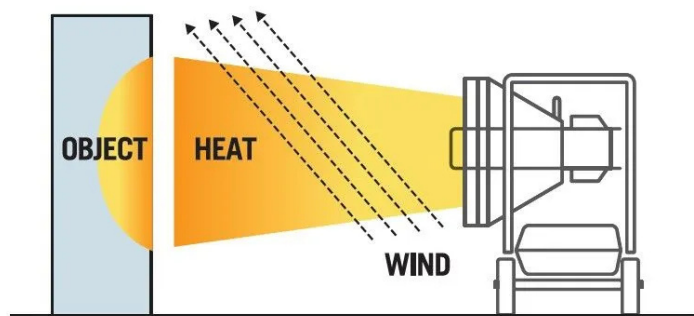

VAL6 EPX (LOW) Heat Output: 100,00 BTU/hr

VS.

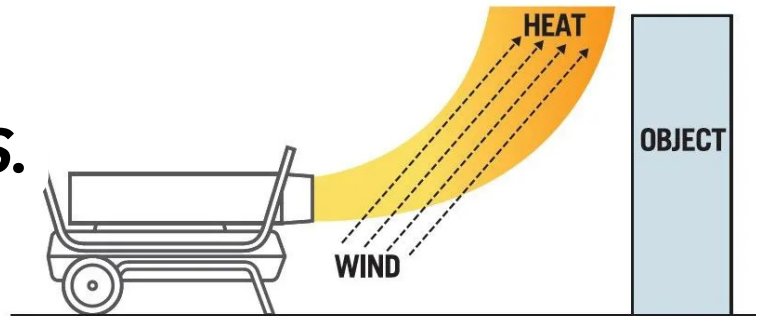

Forced Air (Torpedo) Heat Output: 280,00 BTU/hr

VAL6 IS UNAFFECTED BY WIND OR COLD AIR



HEAT BARN OR GARAGES




HEAT WORKSITES OR SHOPS

How Loud is **TOO LOUD?**

The Max Safe Exposure to Sound is 85dB

Excessive exposure to levels above 85dB can cause headaches, nausea, and **long-term hearing loss**

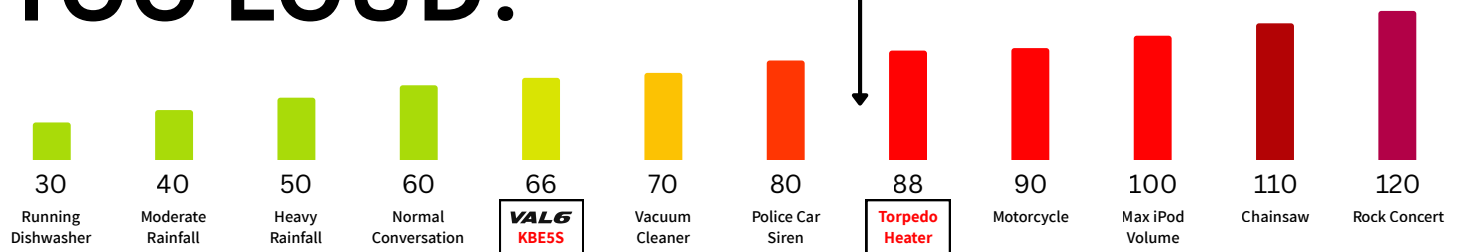

Est. 1956
Guard Sales
Company, Inc



1404 S Kansas Ave.
Topeka Ks, 66612



(785) 235-1378
1-800-443-2445



GuardSalesCo.com